

Standalone AC/DC Power Supply

KOLT

Features

- 1 \emptyset , 230 Vac Input
- 10,5 - 33 Vdc Input
- 18 - 32 Vdc Output
- Built-in Test
- ON/OFF Switch
- Isolated Outputs




AC/DC Standalone Power Supply Unit, converts the 100-240 Vac (47-63 hz frequency range) voltage applied to its input to 28Vdc.

At the same time, the unit which can be supplied with 10,5-33 Vdc Input Voltage so the device can deliver the DC voltage applied to its input to the device connected to its output.

Input Voltage	1-Phase 230 Vac Input 10,5 – 33 Vdc Input
Output Voltage	1-Phase 230 Vac Input 10,5 – 33 Vdc Input
Environmental Test	
Temperature	-40°C to +60°C (Operating Temperature) -40°C to +85°C (Storage Temperature)
Vibration	MIL-STD-810D
Shock	MIL-STD-810G
EMI/EMC	MIL-STD-461E CS101, CS114, CS115, CS116, RE102, RS101, RS103, CE102
Physical Features	
Dimensions	330 x 145 x 150 mm
Weight	3860 gr

Mechanical Drawing(mm)

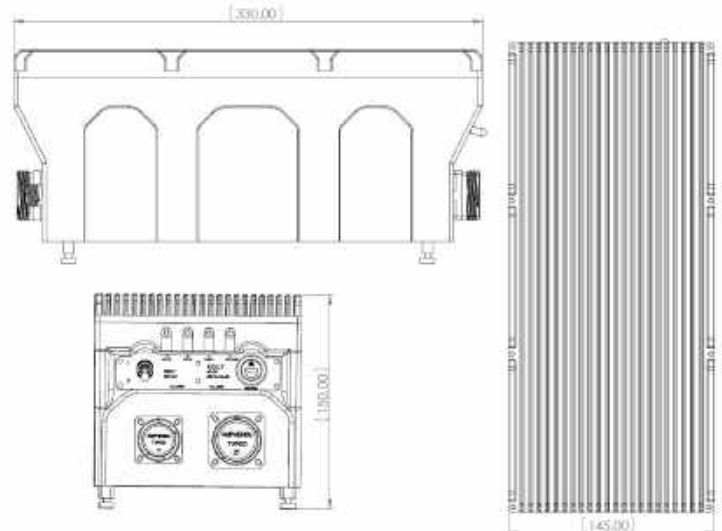

For additional details please contact KOLT.
All Rights Reserved.
Product specifications may change without notice.
info@kolt.com.tr
www.kolt.com.tr